


KOBLINGSSKJEMA. CIRCUIT DIAGRAM

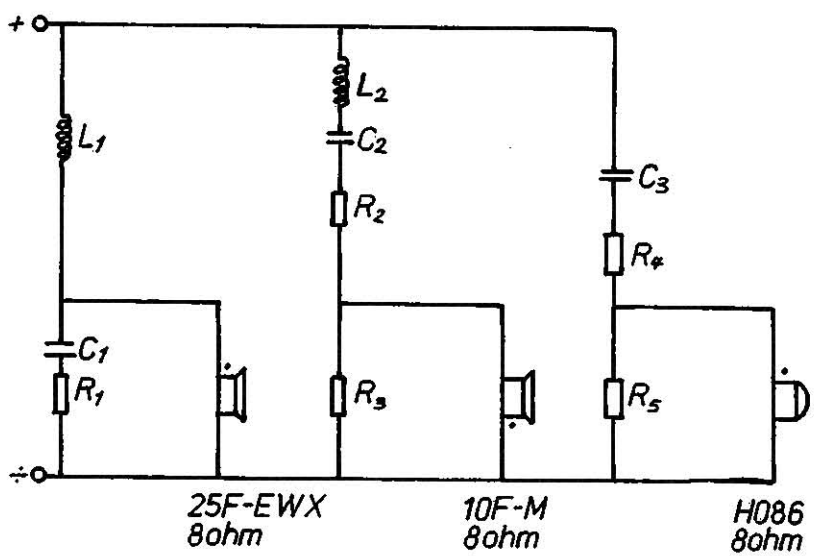

R_5	Motstand	RESISTOR	10ohm	5W	
R_4	Motstand		1ohm	5W	
R_3	Motstand		8ohm	5W	
R_2	Motstand		4,7ohm	5W	
R_1	Motstand		8ohm	5W	
C_3	Kondensator	CAP.	5 μ F	50VDC	
C_2	Kondensator		12 μ F	50VDC	
C_1	Kondensator		36 μ F	50VDC	
L_2	Spole	COIL	D0221S	0,68mH	125t - 0,71Cu
L_1	Spole		D0223SE	3,3mH	240t - 0,71Cu
Benevnelse			Bemerkning		

A. Nyespøler- og omleg. 11.9.74 Klipper	Dato	Sign.	Tegnet	11.9.74	Klipper
			Kontr.	3.10.74	D. J.
Endringer	Målestokk	1:1		Delefilter 3-veis, 8ohm	
			Delefrekvenser 800/4000Hz		D036a
			Erstatning for: D036		
			Erstattet av:		

SEAS FABRIKKER A.S.
 MOSS